105 Commerce Place Goose Creek , SC. 29445

843-881-6262 • www.windwardshutters.com

Our locally made product offerings are available in a wide variety of styles and series to fit your budget and design needs. Most styles available with impact-rated upgrade option; ask your sales rep for details. Shop drawings and specifications available upon request.

MORE CUSTOMIZABLE

One of our proudest claims is that we offer the most customizable shutter on the market, and we will figure out a way to create the exact shutter that meets your specifications. This is the reason why so many architects choose us to provide the historically accurate and built-to-specification shutters you need.

BEST FINISH

Multi-stage finish is the best in the industry and it's AAMA 2605-17 Certified.

Base Coat: Proprietary process


Top Coat: Sherwin Williams Polane® paint with solar reflective properties, high color retention, and high abrasion resistance

LONGER

We offer the most comprehensive lifetime warranty in the business. (See Warranty Details)

BIGGER

A patented structural design allows us to provide shutters that are wider and taller with louver spans up to 45" with no sag or racking.

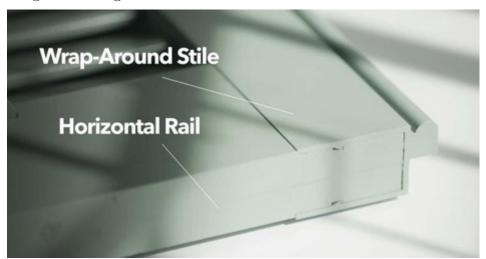

BAHAMA SHUTTERS

Bahama shutters can provide a full view of any skyline or ultimate privacy. Available in polymer composite and aluminum in several series. Choose the design and louver setting to best fit your needs.



Classic Composite Bahama

Thickness: 1 1/4"

Standard Stile Width: 2" Standard Top Rail Height: 3 ¼" Standard Bottom Rail Height: 3 ¼"

Standard Louver Angle: 28° Standard Louver Size: 1 ½"



Deep South Polymer Composite Bahama

Thickness: 1 ¾"

Standard Stile Width: 2"
Standard Top Rail Height: 3 ¼"
Standard Bottom Rail Height: 3 ¼"
Standard Louver Angle: 36°

Standard Louver Size: 2"



<u>Artisan Composite Bahama</u> Flat-Edge Louver Bahama with Bead


Thickness: 1 1/4"

Standard Stile Width: 2"

Louver Size: 2" Shown with mullion

BAHAMA SHUTTERS

continued



E-Class Aluminum Bahama Z-Blade Aluminum Bahama

Thickness: 1 1/4"

Standard Stile Width: 2"

Standard Top Rail Height: 2"

Standard Bottom Rail Height: 2" Standard Louver Angle: 20° Standard Louver Size: 2"

Thickness: 1 1/4"

Standard Stile Width: 2"



Vertical Mullions available in all series **Horizontal Rails** available in all composite series

Vertical mullions added by default at certain width increments for louver support. Available as optional upgrade when not required by width.

BAHAMA SHUTTERS

continued

Available Bahama Louver Settings:



STANDARD VIEWAvailable with: E-Class, Classic, Deep South



SEMI-PRIVACY VIEWAvailable with: E-Class, Classic, Deep South



PRIVACY VIEWAvailable with: E-Class, Classic, Deep South



FULL VIEW Available with: Deep South



CLEAR VIEWAvailable with: Classic, Deep South